


# SS 10108

impo

## KOMPLE PASLANMAZ POMPA FABRICATED STAINLESS STEEL PUMP

60 Hz seçim aralığı: Q= 92 m <sup>3</sup> /sa - 172 m <sup>3</sup> /sa Standart Klepe Çıkışı : NPT - Rp 6 Fan tipi: Semiaksiyel Dönüş : Saat Yönü Ters Bağlantı : NEMA Standardına uygun Mil Çapı : 32 mm	
Minimum sıvı seviyesi: Emiş süzgecinin altından itibaren 1200 mm. Maksimum pompa dış çapı (Kablo muhafazası ile birlikte): 208 mm	
Pompalanan Sıvı: Kimyasal ve mekanik aşındırıcı olmayan akışkan. İzin verilen maksimum kum miktarı = 50 g/m <sup>3</sup> İzin verilen katı parçacık ölçüsü: Max 2mm	
İmalat ve güvenlik standartları: TS 11146:1993 TS EN ISO 12100-1:2007	Tarih 10 / 2012 REV.   0
TS EN 809:2000 98/37/EC TS EN ISO 12100-2:2006	

Operating range at 60 Hz: Q= 92 m <sup>3</sup> /h - 172 m <sup>3</sup> /h Standard Outlet : NPT - Rp 6 Impeller type: Mixed flow Rotation : CCW Connection : According to NEMA Standard Shaft Diameter : 32 mm	
Minimum liquid level (NPSH) : 1200 mm from bottom of suction grid Maximum pump (Wet end) diameter - (Including cable guard): 208 mm	
Liquid being pumped: Chemically and mechanically non aggressive. Maximum allowable solid quantity = 50 g/m <sup>3</sup> Solid dimension: Max 2mm	
Construction and safety standards: TS 11146:1993 TS EN ISO 12100-1:2007	Date 10 / 2012 REV.   0
TS EN 809:2000 98/37/EC TS EN ISO 12100-2:2006	

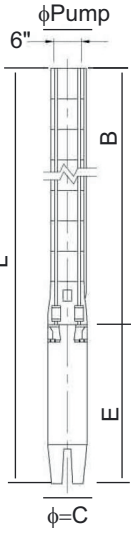

POMPA TİPİ PUMP TYPE	MOTOR MOTEUR			ÖLÇÜLER / DIMENSIONS ( mm )										AĞIRLIK / WEIGHT ( kg )					
	6" HP	8" HP	kW	10"-6"	10"-8"	6"	8"	10"-6"	10"-8"	6"	8"	ø PUMP	ø D	MOTOR		POMPA PUMP		TOPLAM TOTAL	
				L	L	E	E	B	B	ø = C	ø = C			6"	8"	10"-6"	10"-8"	10"-6"	10"-8"
SS 10108/01	18	-	13	1388	-	780	-	608	-	145	-	208	6"	60	-	30	-	90	-
SS 10108/02	35	35	26	1794	1804	1030	1040	764	764	145	195	208	6"	88	140	36	37	124	177
SS 10108/03	50	50	37	2110	1990	1190	1070	920	920	145	195	208	6"	106	146	42	43	148	189
SS 10108/04	-	70	52	-	2286	-	1210	-	1076	-	195	208	6"	-	177	-	50	-	227
SS 10108/05	-	80	59	-	2512	-	1280	-	1232	-	195	208	6"	-	190	-	55	-	245
SS 10108/06	-	100	75	-	2818	-	1430	-	1388	-	195	208	6"	-	218	-	62	-	280
SS 10108/07	-	110	81	-	3044	-	1500	-	1544	-	195	208	6"	-	230	-	68	-	298
SS 10108/08	-	150	110	-	3505	-	1805	-	1700	-	195	208	6"	-	292	-	74	-	366
SS 10108/09	-	150	110	-	3661	-	1805	-	1856	-	195	208	6"	-	292	-	80	-	372

POMPA TİPİ PUMP TYPE	MOTOR MOTEUR			m <sup>3</sup> /h	0	92	100	108	116	124	132	140	148	156	164	172
	6" HP	8" HP	kW	l / sec	0,00	25,6	27,8	30,0	32,2	34,4	36,7	38,9	41,1	43,3	45,6	47,8
				gpm	0	405	440	476	511	546	581	616	652	687	722	757
SS 10108/01	17,5	-	13	Basma Yüksekliği (Hm) Total Dynamic Head (TDH)		32	31	30	29	28	26	25	24	22	20	18
SS 10108/02	35	35	26		63	61	59	58	55	53	51	47	44	40	36	
SS 10108/03	50	50	37		95	92	89	86	83	79	76	71	66	61	53	
SS 10108/04	-	70	52		126	122	119	115	110	105	102	94	88	81	71	
SS 10108/05	-	80	59		158	153	148	144	138	132	127	118	109	101	89	
SS 10108/06	-	100	75		189	183	178	173	165	158	153	142	131	121	107	
SS 10108/07	-	110	81		221	214	207	201	193	184	178	165	153	141	124	
SS 10108/08	-	150	110		252	244	237	230	220	211	204	189	175	162	142	
SS 10108/09	-	150	110		284	275	267	259	248	237	229	212	197	182	160	

Katalogtaki hidrolik karakteristikler çekvalf kayıplarını içermez. Hydraulic characteristics of catalog don't include the loss of check-valve

## Performans eğrileri Performance Curves 1 – 9

